

<b>RATED LOAD - 300 kg / 4 people</b>		<b>ROPING - 2:1</b>		<b>MAXIMUM SPEED - 1 m/s</b>			
Entrances Angle	Car		Shaft		Headroom** CH 2200mm	Pit	Door type Maximum
	Width (A)	Depth (B)	Width (C)	Depth* (D)			
1/0°	850	1000	1350	1225	3400	1050	Side opening 2H 700
2/180°	850	1000	1350	1325			
1/0°	800	1050	1300	1275			
2/180°	800	1100	1300	1425			
1/0°	900	950	1400	1175			
2/180°	900	1000	1400	1325			


<b>RATED LOAD - 375kg / 5 people</b>		<b>ROPING - 2:1</b>		<b>MAXIMUM SPEED - 1 m/s</b>			
Entrances Angle	Car		Shaft		Headroom** CH 2200mm	Pit	Door type Maximum
	Width (A)	Depth (B)	Width (C)	Depth* (D)			
1/0°	800	1200	1300	1425	3400	1050	Side opening 2H 700
2/180°	800	1150	1300	1475			
1/0°	850	1150	1350	1375			
2/180°	850	1100	1350	1425			
1/0°	900	1050	1400	1275			
2/180°	900	1050	1400	1375			

<b>RATED LOAD - 450kg / 6 people</b>		<b>ROPING - 2:1</b>		<b>MAXIMUM SPEED - 1 m/s</b>			
Entrances Angle	Car		Shaft		Headroom** CH 2200mm	Pit	Door type Maximum
	Width (A)	Depth (B)	Width (C)	Depth* (D)			
1/0°	950	1200	1450	1425	3400	1050	Side opening 2H 800
2/180°	950	1200	1450	1525			
1/0°	1000	1150	1500	1375			
2/180°	1000	1100	1500	1425			
1/0°	1000	1200	1500	1425			
2/180°	1000	1200	1500	1525			
1/0°	1000	1250	1500	1475	1575		
2/180°	1000	1250	1500	1575			

<b>RATED LOAD - 630kg / 8 people</b>		<b>ROPING - 2:1</b>		<b>MAXIMUM SPEED - 1 m/s</b>			
Entrances Angle	Car		Shaft		Headroom** CH 2200mm	Pit	Door type Maximum
	Width (A)	Depth (B)	Width (C)	Depth* (D)			
1/0°	1100	1400	1600	1675	3400	1050	Side opening 2H 800
2/180°	1100	1400	1600	1775			
1/0°	1100	1400	1600	1675			Side opening 2H 900
2/180°	1100	1400	1600	1775			

- Minimum shaft and car dimensions
- Standard car dimensions
- Car EN81-70

\* According to the door and opening type.  
 \*\* Headroom option reduced by 3250 mm with 2050 mm car.

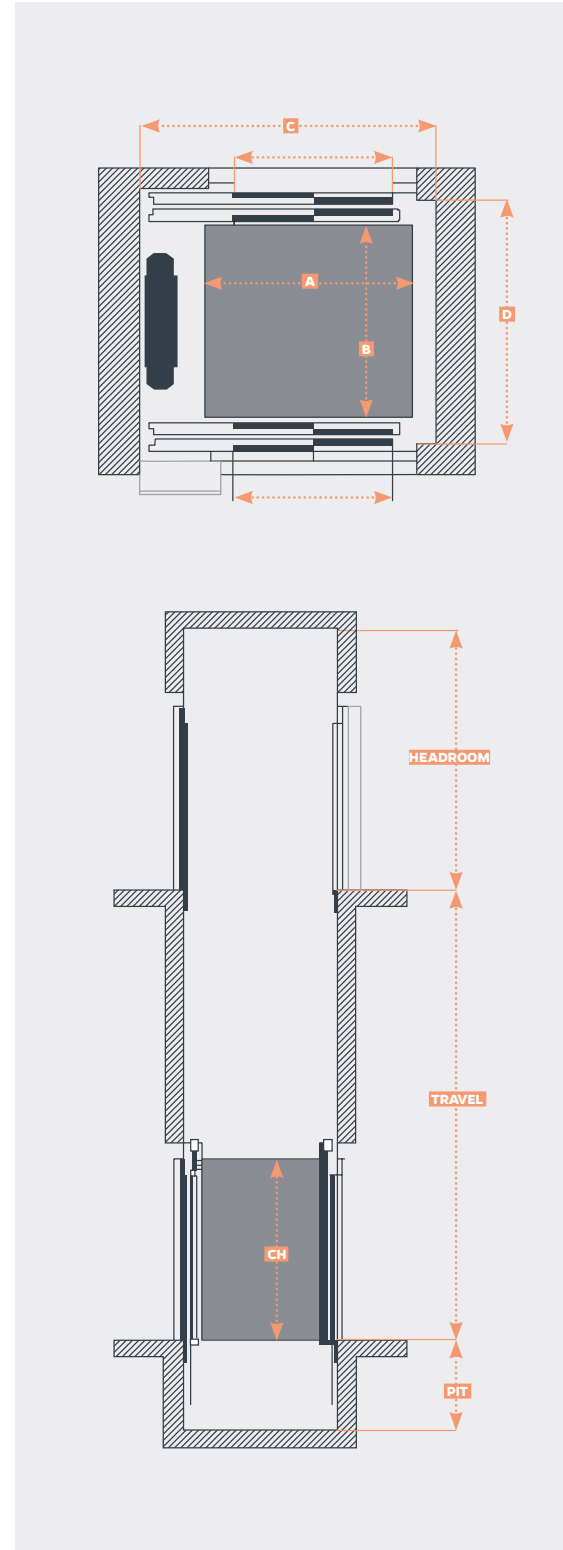

## Operational ranges (standard mechanics)

<b>Maximum travel</b>	Up to 60 m	
<b>Shaft</b>	<b>Pit</b>	Standard minimum: 1050 mm
	<b>Headroom</b>	Standard minimum (2200 mm) car: 3400 mm Reduced minimum (2050 mm car): 3250 mm
	<b>Minimum width</b>	Car width + 500 mm
	<b>Minimum depth</b>	Single entrance: 950mm Double entrance: 1050mm
<b>Car</b>	<b>Maximum depth</b>	1500 mm
	<b>Minimum width</b>	800 mm
	<b>Maximum width</b>	1300 mm
	<b>Standard height</b>	2200 mm (options from 2050 mm to 2300 mm in increments of 50 mm)